



CONTACT FOAM

Reliability for years, comfort every day

abrisojiffy.com

ABRISO JIFFY

A good floor starts with a solid base

The floor is the foundation of every interior – it determines the comfort, aesthetics and durability of the entire space. To perform its function for many years, it requires a solid base. This is exactly the role that **Abriso Jiffy** flooring underlays fulfil.

Abriso Jiffy combines innovative technology, high quality and environmental care. All our underlays are fully recyclable while ensuring maximum durability and user comfort.



BY CHOOSING ABRISO JIFFY UNDERLAYS, YOU GAIN:



Excellent subfloor
levelling



Effective protection
against moisture



Noise reduction
and improved acoustic comfort



Floor durability even
in demanding conditions




Solutions suitable for laminate,
wooden and LVT/SPC flooring

CONTACTFOAM BASIC

The Basic underlay is an economical and easy-to-install solution designed for laminate flooring. It provides basic subfloor protection, levels small irregularities and improves acoustic comfort.

Additional parameters:

- surface mass 32 g/m²;
- water absorption after 24 h ≤ 2%;
- dynamic stiffness SD 200;
- heat resistance after 24 h at +40°C – dimensional change < ±2.5%.

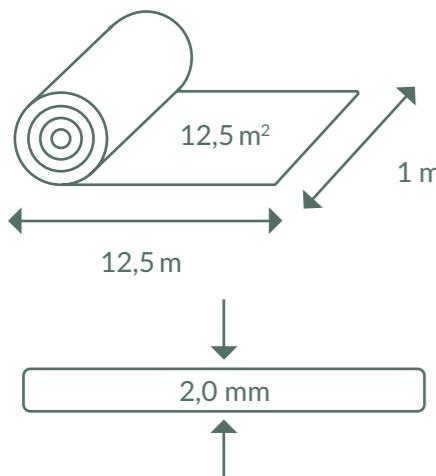

Roll without bag, box
with window
1200 x 800
+ stretch wrap

Number of boxes
per pallet
2

Number of rolls
per box
24

BENEFITS:



LOW PRICE



EASY INSTALLATION



IMPACT SOUND
REDUCTION



FULLY RECYCLABLE
PRODUCT



2-IN-1 SOLUTION
THAT SAVES
INSTALLATION TIME



MOISTURE
PROTECTION



ACOUSTIC
COMFORT



EASY
INSTALLATION

COLOUR	PC	CS	DL	λ
White	1,5 mm	≥5 kPa	-	0,046 W/mK
DENSITY	R	IS	SD	Additional layer




CONTACTFOAM BASIC SILVER

Basic Silver is an enhanced version of the underlay with a metallised layer that provides the highest level of moisture protection. It is an excellent choice for those seeking an affordable yet effective solution for laminate flooring.

Additional parameters:

- surface mass 32 g/m²;
- water absorption after 24 h ≤ 2%;
- dynamic stiffness SD 200;
- heat resistance after 24 h at +40°C – dimensional change < ±2.5%.

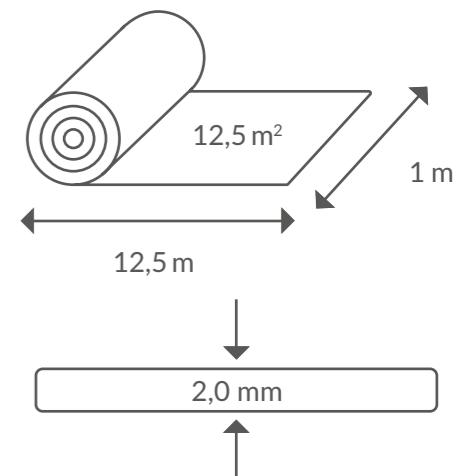

Roll without bag, box
with window
1200 x 800
+ stretch wrap

Number of boxes
per pallet
2

Number of rolls
per box
24

BENEFITS:



LOW PRICE



EASY INSTALLATION



IMPACT SOUND
REDUCTION



FULLY RECYCLABLE
PRODUCT



2-IN-1 SOLUTION
THAT SAVES
INSTALLATION TIME



MOISTURE
PROTECTION



ACOUSTIC
COMFORT



EASY
INSTALLATION


COLOUR	PC	CS	DL	λ
White	1,5 mm	≥5 kPa	-	0,046 W/mK
DENSITY	R	IS	SD	Additional layer PET MET

CONTACTFOAM BASIC +

The Basic+ underlay stands out with its increased thickness, which effectively levels subfloor irregularities. It is recommended for laminate flooring in areas with less demanding operating conditions.

Additional parameters:

- surface mass 48 g/m²;
- water absorption after 24 h ≤ 2%;
- dynamic stiffness SD 200;
- heat resistance after 24 h at +40°C – dimensional change < ±2.5%.

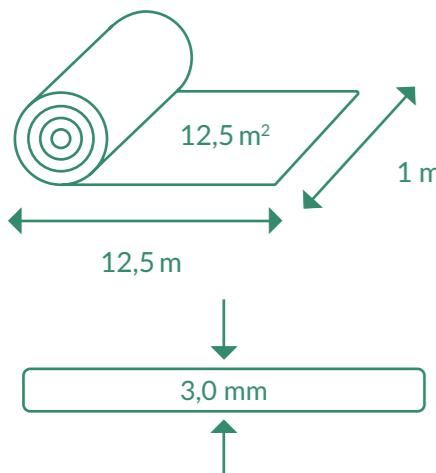

Roll without bag,
box with window
1200 x 800
+ stretch wrap

Number of boxes
per pallet
2

Number of rolls
per box
15

BENEFITS:



GOOD SUBFLOOR
LEVELLING



AFFORDABLE
PRICE



IMPACT SOUND
REDUCTION



FULLY RECYCLABLE
PRODUC



2-IN-1 SOLUTION
THAT SAVES
INSTALLATION TIME



MOISTURE
PROTECTION



GOOD
SUBFLOOR
LEVELLING



IMPACT
SOUND
REDUCTION



RECYCLABLE

COLOUR	PC	CS	DL	λ
White	2 mm	≥5 kPa	-	0,046 W/mK
DENSITY	R	IS	SD	Additional layer

COLOUR	PC	CS	DL	λ
White + yellow film	2 mm	≥5 kPa	-	0,046 W/mK
DENSITY	R	IS	SD	Additional layer LDPE 40 mic.




CONTACTFOAM UNIVERSAL

Universal is a thicker underlay that perfectly levels subfloor irregularities. Thanks to an additional LDPE film layer, it offers increased moisture resistance and protects the underlay against damage. It effectively reduces impact noise and is dedicated to laminate flooring.

Additional parameters:

- surface mass 48 g/m²;
- water absorption after 24 h ≤ 2%;
- dynamic stiffness SD 200;
- heat resistance after 24 h at +40°C – dimensional change < ±2.5%.

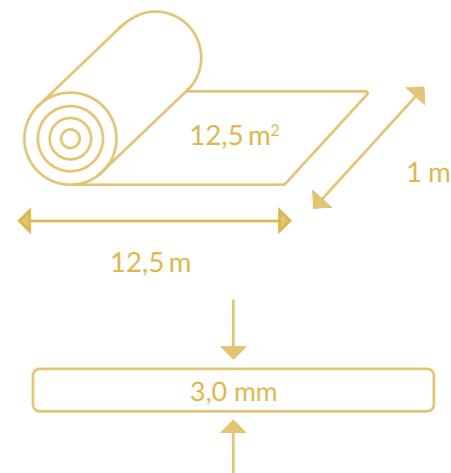

Roll in bag,
box with window
1200 x 800

Number of boxes
per pallet
2

Number of rolls
per box
15

BENEFITS:



GOOD SUBFLOOR
LEVELLING



IMPACT SOUND
REDUCTION



MOISTURE
PROTECTION



GOOD
SUBFLOOR
LEVELLING



IMPACT
SOUND
REDUCTION




RECYCLABLE

CONTACTFOAM STANDARD

Standard is a thin and dense underlay, perfect for underfloor heating and areas requiring good mechanical performance. It works great under both laminate and wooden floors.

Additional parameters:

- rectangularity (q) < 5 mm/m;
- flatness (S) < 2 mm/m.

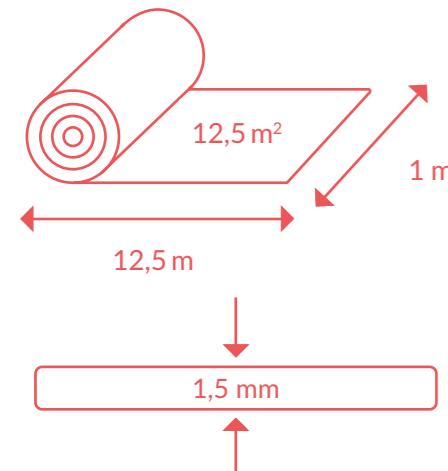

Roll in bag,
box with window
1200 x 800

Number of boxes
per pallet
1

Number of rolls
per box
32

BENEFITS:



THIN
AND DURABLE



IDEAL FOR UNDERFLOOR
HEATING



GOOD MECHANICAL
RESISTANCE



FULLY RECYCLABLE
PRODUCT



HIGH DURABILITY
AND QUALITY



EXCELLENT ACOUSTIC
INSULATION



IDEAL FOR UNDERFLOOR
HEATING



FULLY RECYCLABLE
PRODUCT

COLOUR	PC	CS	DL ₂₅	λ
Red	1,3 mm	≥40 kPa	>10000 cycles	-
60 kg/m ³	R	18 dB	-	Additional layer

COLOUR	PC	CS	DL ₂₅	λ
Blue	1,5 mm	≥60 kPa	>100000 cycles	-
100 kg/m ³	R	20 dB	-	Additional layer




CONTACTFOAM OPTIMAL

The Optimal underlay combines high quality and durability with excellent acoustic insulation and point-load levelling. Recommended for laminate and wooden floors in areas with heavy traffic and higher usage demands. Compatible with underfloor heating systems.

Additional parameters:

- rectangularity (q) < 5 mm/m;
- flatness (S) < 2 mm/m.

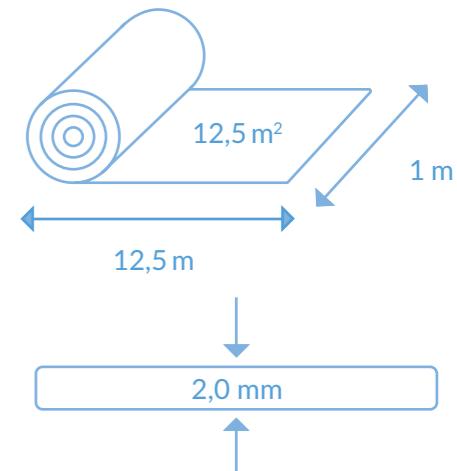

Roll without bag,
box with window
1200 x 800
+ stretch wrap

Number of boxes
per pallet
1

Number of rolls
per box
24

BENEFITS:



HIGH DURABILITY
AND QUALITY



EXCELLENT ACOUSTIC
INSULATION



IDEAL FOR UNDERFLOOR
HEATING




FULLY RECYCLABLE
PRODUCT

CONTACTFOAM OPTIMAL SILVER

Optimal Silver is an enhanced version with a metallised layer, providing excellent acoustic insulation and the highest level of moisture protection. Suitable for laminate and wooden floors in areas with increased humidity risk and heavy traffic. Compatible with underfloor heating.

Additional parameters:

- rectangularity (q) $< 5 \text{ mm/m}$;
- flatness (S) $< 2 \text{ mm/m}$.

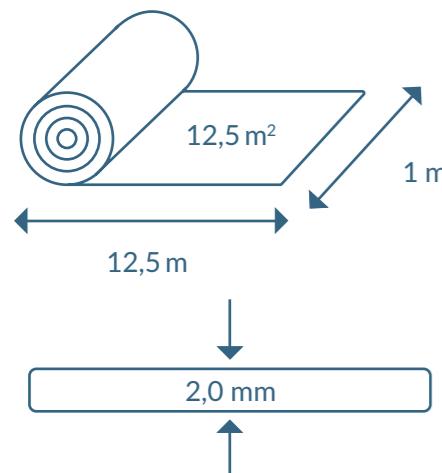

Roll in bag,
box with window
1200 x 800

Number of boxes
per pallet
1

Number of rolls
per box
24



BENEFITS:



MOISTURE
PROTECTION



EXCELLENT ACOUSTIC
INSULATION



DURABILITY
AND RESISTANCE



IDEAL FOR UNDERFLOOR
HEATING



EXCELLENT FOR
LVT/SPC PANELS WITH
RIGID CORE



HIGH MOISTURE
RESISTANCE



IDEAL
FOR UNDERFLOOR
HEATING



FULLY RECYCLABLE
PRODUCT

COLOUR	PC	CS	DL ₂₅	λ
Blue	1,5 mm	≥60 kPa	>100000 cycles	-

DENSITY
100 kg/m³

R
0,045 m²K/W

IS
20 dB

SD
>75

Additional layer
PET MET

COLOUR	PC	CS	DL ₇₅	λ
Black	0,7 mm	≥600 kPa	>250000 cycles	-

DENSITY
300 kg/m³

R
0,02 m²K/W

IS
20 dB

SD
-


Additional layer
-

CONTACTFOAM LVT RIGID PRO

LVT Rigid Pro is an exceptionally thin and durable high-density underlay designed specifically for LVT and SPC rigid-core panels. Its moisture resistance and excellent mechanical performance make it ideal for underfloor heating.

Additional parameters:

- rectangularity (q) $< 5 \text{ mm/m}$;
- flatness (S) $< 2 \text{ mm/m}$.

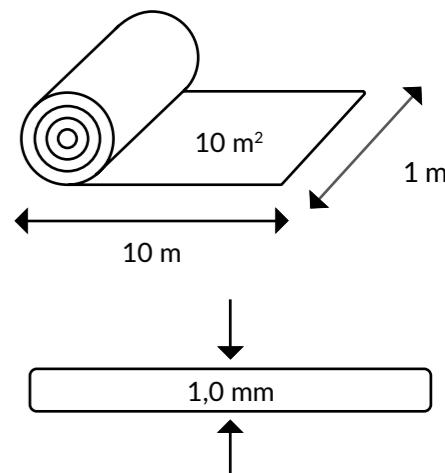

Shrink-wrap, label,
box without window
1200 x 800

Number of boxes
per pallet
1

Number of rolls
per box
54

BENEFITS:



WE CREATE. WE SUSTAIN. WE PROTECT.

CONTACT US

abrisojiffy.com



JIFFY PACKAGING SP. Z O.O.



Al. Jana Nowaka Jeziorańskiego 39
44-102 Gliwice
Poland



ul. Skłodowskiej 1
59-830 Olszyna
Poland



biuro@abrisojiffy.com



+48 32 33 00 300